

Military & GOVERNMENT

PROFESSIONAL GRADE FEATURES



ADJUSTABLE SOLID RUBBER HOSE TO STOP
for lead length positioning

VERSATILE GUIDE ARM adjusts to wall,
floor, ceiling & vehicle mounting

**HEAVY DUTY SOLID SPUN DISCS WITH ROLLED
EDGES** - not stamped, for greater strength, made
with first of its kind CNC robotic spinning cell


**EXTERNAL FLUID PATH WITH FULL FLOW BRASS
NPT SWIVEL** that screws directly on 1" solid
steel axle, swivel is easily removed for fast,
easy maintenance

HIGH QUALITY STEEL CONSTRUCTION
with our durable CPC™ powder coat finish

**ENCLOSED FACTORY TUNED AND MATCHED
CARTRIDGE-STYLE SPRING MOTOR** for safe
and easy maintenance. Models equipped
with **EZ-COIL**, Coxreels patented safety
system, retracts up to 80% slower than
conventional reels

**TRIPLE AXLE SUPPORT WITH SUPER HUB™ &
A FULL FRAME** increased reel strength for more
demanding applications

Only on T Series. SH Series features dual axle support

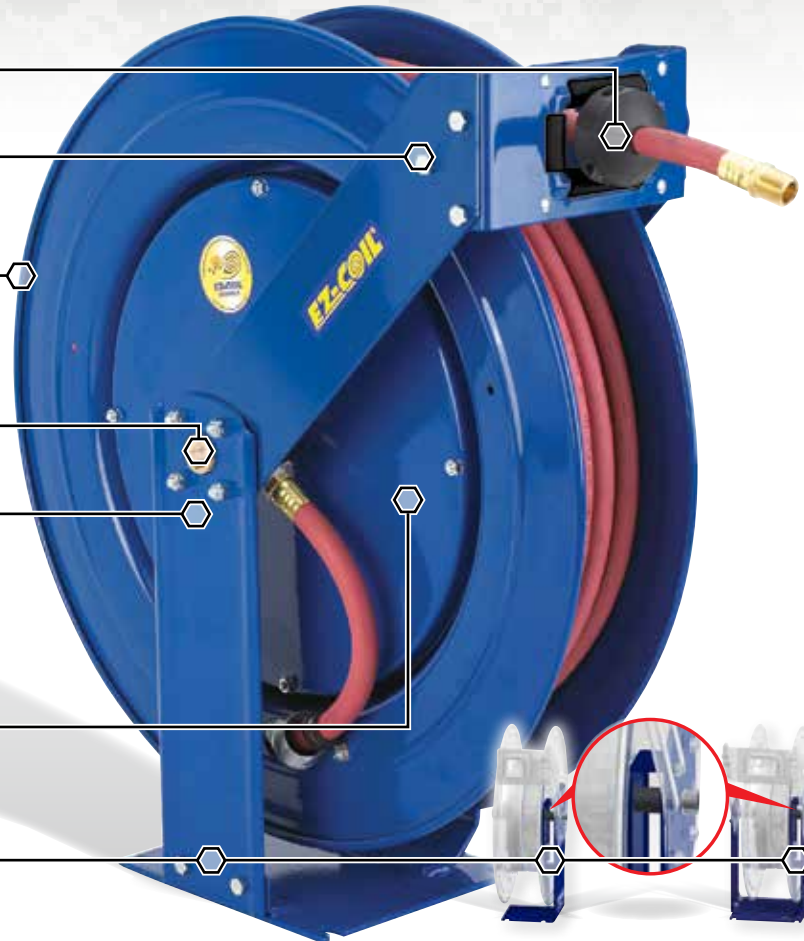

POSSIBLE FIELDS OF APPLICATION

- Pneumatic Tools
- Welding
- Aircraft Maintenance
- Power Tools
- Firefighting & Rescue
- Vehicle Maintenance
- Lubrication / Refueling
- Ground Maintenance
- Ship Maintenance



www.coxreels.com

800.COX.REEL

P: 480.820.6396

F: 480.820.5132

E: info@coxreels.com

Military & Government



P SERIES

- External fluid path with machined from solid brass 90° full-flow NPT swivel inlet (Zinc plated steel swivel on HP models)
- Swivel Seals: NITRILE
- Sturdy single pedestal spring driven reel with space saving design facilitates workplace organization
- Available in Medium & High Pressure

| MODEL | EZ-Coil® Safety Line | I.D. | FT. | PSI | APRX. LBS. | W x H x L |
|----------|----------------------|------|-----|-----|------------|--------------------------|
| P-LP-125 | EZ-P-LP-125 | 1/4" | 25 | 300 | 27 | 5 7/8 x 14 7/8 x 13 1/2" |
| P-LP-150 | EZ-P-LP-150 | 1/4" | 50 | 300 | 40 | 6 3/4 x 18 5/8 x 17 1/8" |
| P-LP-325 | EZ-P-LP-325 | 3/8" | 25 | 300 | 28 | 6 1/2 x 14 7/8 x 13 1/2" |
| P-LP-350 | EZ-P-LP-350 | 3/8" | 50 | 300 | 43 | 6 3/4 x 18 5/8 x 17 1/8" |
| P-LP-425 | - | 1/2" | 25 | 300 | 44 | 7 x 18 5/8 x 17 1/8" |
| P-LP-450 | EZ-P-LP-450 | 1/2" | 50 | 300 | 48 | 7 x 18 5/8 x 17 1/8" |



T SERIES - EQUIPPED WITH SUPER HUB™

- External fluid path with machined from solid brass 90° full-flow NPT swivel inlet (Zinc plated steel swivel on HP models)
- Swivel Seals: NITRILE
- Sturdy dual pedestal reel features Coxreels' exclusive Super Hub™ dual axle support system
- Available in Medium / High Pressure



| MODEL | EZ-Coil® Safety Line | I.D. | FT. | PSI | APRX. LBS. | W x H x L |
|------------|----------------------|------|-----|-----|------------|--------------------------|
| TSH-N-350 | EZ-TSH-350 | 3/8" | 50 | 300 | 61 | 9 3/8 x 21 1/4 x 19 1/2" |
| TSH-N-3100 | EZ-TSH-3100 | 3/8" | 100 | 300 | 85 | 9 3/8 x 25 1/2 x 24" |
| TSH-N-450 | EZ-TSH-450 | 1/2" | 50 | 300 | 63 | 9 3/8 x 21 1/4 x 19 1/2" |
| TSH-N-4100 | EZ-TSH-4100 | 1/2" | 100 | 300 | 95 | 9 3/8 x 25 1/2 x 24" |
| TSH-N-550 | EZ-TSH-550 | 3/4" | 50 | 300 | 83 | 9 7/8 x 25 1/2 x 24" |
| TSH-N-575 | - | 3/4" | 75 | 300 | 93 | 12 x 25 1/2 x 24" |
| TSH-N-635 | - | 1" | 35 | 300 | 92 | 10 x 25 1/2 x 24" |
| TSH-N-650 | - | 1" | 50 | 300 | 98 | 12 x 25 1/2 x 24" |



SP SERIES

- External fluid paths with machined from solid brass 90° full-flow NPT swivel inlets
- Swivel Seals: NITRILE (AFLAS on 1" models)
- Reel features a sturdy box-style frame design. Reel adjusts to wall, floor, vehicle & overhead position
- Long lasting self-lubricated flange bearings for smooth rotation
- Available in Medium Pressure
- * Supplied with fuel hose

| MODEL | I.D. | O.D. | FT. | PSI | APRX. LBS. | W x H x L |
|-----------|--------|----------|-----|-----|------------|---------------------------|
| SLPL-4100 | 1/2" | 3/4" | 100 | 300 | 96 | 18 1/2 x 20 1/2 x 22 7/8" |
| SLPL-550 | 3/4" | 1 1/16" | 50 | 300 | 86 | 19 5/8 x 20 1/2 x 22 7/8" |
| SLPF-550* | 3/4" | 1 1/16" | 50 | 300 | 107 | 19 5/8 x 20 1/2 x 22 7/8" |
| SLPL-575 | 3/4" | 1 1/16" | 75 | 300 | 117 | 19 5/8 x 24 1/2 x 26 3/8" |
| SLPL-650 | 1" | 1 1/2" | 50 | 300 | 109 | 19 5/8 x 24 1/2 x 26 3/8" |
| SLPF-650* | 1" | 1 1/2" | 50 | 300 | 142 | 19 5/8 x 24 1/2 x 26 3/8" |
| SLPL-675 | 1" | 1 1/2" | 75 | 300 | 148 | 21 x 28 1/2 x 30 3/8" |
| SLPL-750 | 1 1/2" | 1 13/16" | 50 | 250 | 123 | 18 x 28 1/2 x 30 3/8" |
| SLPL-850 | 1 1/2" | 2 1/16" | 50 | 250 | 138 | 20 x 28 1/2 x 30 3/8" |



FUEL HOSE T SERIES

- Machined from solid brass 90° full-flow NPT swivel inlet for fuel dispensing applications. Electroless nickel plated steel swivel on 1" models
- Swivel Seals: NITRILE
- Fuel dispensing hose designed to convey non-aromatic fuels including diesel, kerosene, fuel oil & heating oil.

| MODEL | EZ-Coil® Safety Line | I.D. | O.D. | FT. | PSI | APRX. LBS. | W x H x L |
|------------|----------------------|------|---------|-----|-----|------------|--------------------------|
| TSHF-N-550 | EZ-TSHF-550 | 3/4" | 1 3/16" | 50 | 300 | 91 | 10 x 25 1/2 x 24" |
| TSHF-N-575 | - | 3/4" | 1 3/16" | 75 | 300 | 105 | 12 x 25 1/2 x 24" |
| TSHF-N-635 | - | 1" | 1 1/2" | 35 | 300 | 95 | 9 7/8 x 21 7/8 x 20 3/8" |
| TSHF-N-650 | - | 1" | 1 1/2" | 50 | 300 | 101 | 12 x 25 1/2 x 24" |



SD & SDH SERIES

- Available with 7 strand x 7 wire galvanized steel or stainless steel cable
- Compact static discharge cable reel available in spring rewind or direct hand crank retraction
- Non corrosive stainless steel spring, pawl & zinc plated ratchet
- Suffix models with -1 for stainless steel cable

| MODEL | EZ-Coil® Safety Line | O.D. | FT. | APRX. LBS. | W x H x L |
|---------|----------------------|-------|-----|------------|----------------------|
| SD-35 | EZ-SD-35 | 5/32" | 35 | 18 | 3 7/8 x 11 1/2 x 11" |
| SD-50 | EZ-SD-50 | 5/32" | 50 | 20 | 3 7/8 x 11 1/2 x 11" |
| SD-75 | EZ-SD-75 | 5/32" | 75 | 31 | 4 x 15 x 14 1/2" |
| SD-100 | EZ-SD-100 | 5/32" | 100 | 32 | 4 x 15 x 14 1/2" |
| SDH-100 | - | 5/32" | 100 | 24 | 5 3/4 x 11 1/2 x 11" |
| SDH-200 | - | 5/32" | 200 | 28 | 5 3/4 x 11 1/2 x 11" |



1125 SERIES

- External fluid path with machined from solid brass 90° full-flow NPT swivel inlet (Nickel plated steel swivel on 1" models)
- Swivel Seals: NITRILE (AFLAS on 1" models)
- Exclusive low profile outlet riser & open drum slot design for flat smooth hose wrap
- All welded steel "A" frame construction for superior reel structure
- Stainless steel construction available

| MODEL | MOTOR OPTION | I.D. | FT. | PSI | APRX. LBS. | W x H x L |
|------------|----------------------------------|------|-----|-------|------------|---------------------------|
| 1125-4-100 | Electric Motor Options Available | 1/2" | 100 | 3,000 | 36 | 19 1/2 x 18 3/4 x 17 5/8" |
| 1125-4-200 | | 1/2" | 200 | 3,000 | 39 | 25 1/2 x 18 3/4 x 17 5/8" |
| 1125-4-325 | | 1/2" | 325 | 3,000 | 48 | 31 1/2 x 18 3/4 x 17 5/8" |
| 1125-4-500 | | 1/2" | 500 | 3,000 | 58 | 41 1/2 x 18 3/4 x 17 5/8" |
| 1125-5-100 | | 3/4" | 100 | 3,000 | 42 | 26 3/4 x 18 3/4 x 17 5/8" |
| 1125-5-175 | | 3/4" | 175 | 3,000 | 50 | 32 3/4 x 18 3/4 x 17 5/8" |
| 1125-5-200 | | 3/4" | 200 | 3,000 | 55 | 38 3/4 x 18 3/4 x 17 5/8" |
| 1125-5-250 | | 3/4" | 250 | 3,000 | 59 | 42 3/4 x 18 3/4 x 17 5/8" |
| 1125-6-100 | | 1" | 100 | 3,000 | 69 | 44 1/2 x 18 1/2 x 17 5/8" |



1175 SERIES

- External fluid path with machined from solid brass 90° full-flow NPT swivel inlet
- Swivel Seals: AFLAS
- Exclusive low profile outlet riser, open drum slot design for flat smooth hose wrap.
- Stainless steel construction available

| MODEL | MOTOR OPTION | I.D. | O.D. | FT. | PSI | APRX. LBS. | W x H x L |
|------------|----------------------------------|------|---------|-----|-------|------------|-----------------------|
| 1175-6-50 | Electric Motor Options Available | 1" | 1 7/16" | 50 | 3,000 | 67 | 24 1/8 x 26 1/8 x 24" |
| 1175-6-100 | | 1" | 1 7/16" | 100 | 3,000 | 70 | 28 1/8 x 26 1/8 x 24" |
| 1175-6-150 | | 1" | 1 7/16" | 150 | 3,000 | 75 | 32 1/8 x 26 1/8 x 24" |
| 1175-6-200 | | 1" | 1 7/16" | 200 | 3,000 | 83 | 36 5/8 x 26 1/8 x 24" |



1185 SERIES

- External fluid path with in-line aluminium straight, full flow NPT swivel inlet
- Swivel Seals: NITRILE
- Exclusive low profile outlet riser, open drum slot design for flat smooth hose wrap.

| MODEL | MOTOR OPTION | I.D. | O.D. | FT. | PSI | APRX. LBS. | W x H x L |
|-----------|----------------------------------|--------|---------|-----|-----|------------|-------------------|
| 1185-1124 | Electric Motor Options Available | 1 1/2" | 2 1/16" | 50 | 600 | 76 | 25 x 26 x 24" |
| 1185-1524 | | 1 1/2" | 2 1/16" | 75 | 600 | 81 | 29 x 26 x 24" |
| 1185-2024 | | 1 1/2" | 2 1/16" | 100 | 600 | 94 | 33 1/2 x 26 x 24" |
| 1185-2528 | | 1 1/2" | 2 1/16" | 150 | 600 | 122 | 38 1/2 x 30 x 28" |

CHOICE OF MOTORS
1125, 1175 & 1185



This selection only represents a sample of products applicable in this industry. Please visit us online or consult the factory for more product options.

www.coxreels.com

800.COX.REEL

P: 480.820.6396

F: 480.820.5132

E: info@coxreels.com

CF-MG-001