C SERIES AIR/WATER - DUAL PURPOSE HOSE REELS

COXREELS® C Series "Combination" spring driven hose reels are a combination of two hose reels in one compact assembly. They are perfect for applications in which two sources are needed to get the job done when space is a critical factor. The single mounting base creates stability and adds to the convenience of one mounting pattern. This series is also available in air hose/electrical cord combinations.

LOW PRESSURE

Models with hose are for air or water service with a maximum temperature 65˚ C. Models less hose can be used for air, water or oil.
Note: Do not exceed listed hose O.D. to obtain maximum length.

HOSE						LESS HOSE		SIZE INDEX
MODEL	I.D. mm	O.D. mm	LENGTH m	BAR	Kg.	MODEL	Kg.	
C-LP-125-125	6	13	8	21	30	**C-LPL-125-125**	27	**1**
C-LP-135-135	6	13	11	21	30	**C-LPL-135-135**	27	**1**
C-LP-150-150	6	13	15	21	34	**C-LPL-150-150**	29	**1**
C-LP-325-325	10	16	8	21	30	**C-LPL-325-325**	27	**2**
C-LP-335-335	10	16	11	21	31	**C-LPL-335-335**	27	**2**
C-LP-350-350	10	16	15	21	35	**C-LPL-350-350**	29	**2**
C-LP-425-425	13	19	8	21	32	**C-LPL-425-425**	27	**3**

MEDIUM PRESSURE

Reels are furnished with standard one wire braid hose suitable for air, water or oil applications. Hose exceeds SAE R1 specifications. Maximum temperature 120˚ C. **Note: Do not exceed listed hose O.D. to obtain maximum length.**

HOSE						LESS HOSE		SIZE INDEX
MODEL	I.D. mm	O.D. mm	LENGTH m	BAR	Kg.	MODEL	Kg.	
C-MP-325-325	10	17	8	207	36	**C-MPL-325-325**	30	**2**
C-MP-335-335	10	17	11	207	39	**C-MPL-335-335**	31	**2**
C-MP-425-425	13	21	8	172	35	**C-MPL-425-425**	29	**3**
C-MP-430-430	13	21	9	172	38	**C-MPL-430-430**	30	**3**

HIGH PRESSURE

Reels are furnished standard with S.A.E. 100R16 #1 or #2 wire braid hose suitable for grease and hydraulic oil applications. Maximum temp. 120˚ C. **Note: Do not exceed listed hose O.D. to obtain maximum length.**

HOSE						LESS HOSE		SIZE INDEX
MODEL	I.D. mm	O.D. mm	LENGTH m	BAR	Kg.	MODEL	Kg.	
C-HP-125-125	6	14	8	345	35	**C-HPL-125-125**	30	**3**
C-HP-135-135	6	14	11	345	38	**C-HPL-135-135**	31	**3**
C-HP-325-325	10	17	8	276	35	**C-HPL-325-325**	29	**3**
C-HP-330-330	10	17	9	276	37	**C-HPL-330-330**	30	**3**

REEL DIMENSIONS

Technical Data Sheets Available On Website

SIZE INDEX	W mm	H mm	L mm	X mm	Y mm	M mm	N mm
1	267	473	432	203	229	178	203
2	292	473	432	203	229	178	203
3	292	473	432	203	229	178	203
	Overall Dimensions			Base		Mounting Pattern	

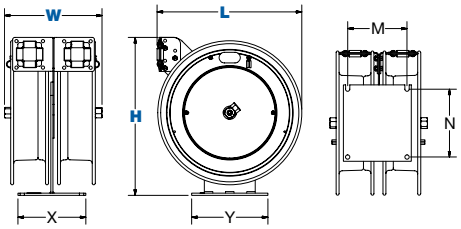

SPRING DRIVEN

C SERIES :: REEL SPECIFICATIONS

SWIVEL

- Two external fluid paths with machined from solid brass 90° full-flow NPT swivel inlets
  (Zinc plated steel swivels on HP models)

Swivel Seals: NITRILE

DESIGN & STRUCTURE

- Compact two reel assembly for dual hose applications, each reel operates independently
- Guide arm adjusts to wall, floor & overhead positions
- Single expanded, 6 mm steel mounting base for increased stability & space efficiency
- One mounting pattern allow 1/2 the installation time required to install 2 reels at one station
- 25 mm solid steel axle & lubricated precision bearings for smooth rotation

RETRACTION

- Enclosed factory tuned & matched cartridge-style spring motor
- Non-corrosive stainless steel spring, pawl & zinc plated ratchet
- Multi-position lock ratchet mechanism secures hose at desired length

SIGNATURE FEATURES

- Professional grade heavy duty steel construction
- Durable proprietary CPC™ powder coat process
- Rolled edges & ribbed discs provide strength & safety
- Leading 2-year manufacturer's limited warranty
- Made in the U.S.A. - Sold & Supported Worldwide

POSSIBLE FIELDS OF APPLICATION

- Air/Water Services
- Pneumatic Tools
- Washdown
- Lubrication
- Chemical Fluid Transfer
- General Industrial
- Manufacturing Plants & Facilities
- Maintenance, Repair & Operations
- Automotive & Fleet Service Centers

ACCESSORIZE YOUR REEL :: PG 50

- O-Rings & Swivels
- Mounting Brackets
- Hoses
- Assorted Reel Accessories